






- For outdoor wall mounted applications
- The body is made in polyester powder coated die-cast aluminium with a tempered glass diffuser
- Silicon o-ring seals
- Stainless steel external screws
- Available in a unidirectional version and a bidirectional version
- Can be installed on normally flammable surfaces
- Class 1
- IP54





code lamp details
Unidirectional mono-light
AR/152321 18W 230V Gx24d-2
 Includes integral ballast

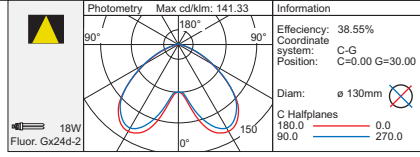

code lamp details
Bidirectional double-light
AR/152022 150W 230V Ba15d

