



- Technical downlights
- Body and ring in die-cast aluminium
- Low glare
- High performance reflector in aluminium
- Safety glass diffuser
- Remote transformer required
- Can be installed on normally flammable surfaces
- Class 3
- IP 20





Fig. 1 - Lamp Maintenance








code lamp details
 Low glare downlight for 50W bipin lamps. Cut off of 50° (L<200cd/m2)

1700 50W 12V Gy6.35
 Remote transformer required

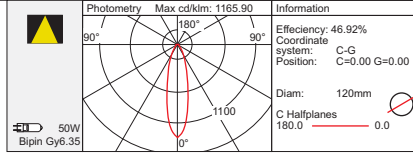

code lamp details
 Low glare downlight for 50W dichroic lamps. Cut off of 60° (L<200cd/m2)

1720 50W 12V Gu5.3
 Remote transformer required

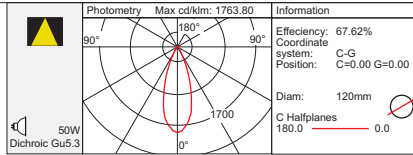

Accessories



code details weight
STR 50 dimmable safety transformer

7301 50VA 750grms

See transformers, gears and accessories



code details weight
Precise electronic dimmable transformer

7373 20-50VA 70.4grms

See transformers, gears and accessories



code details weight
TLC dimmable safety transformer

7303 50VA 1080grms

See transformers, gears and accessories