





- Recessed interior/exterior fluorescent light
- Available in the following variations
 - One light symmetric
 - Two light symmetric
 - One light asymmetric
- The body is made in extruded aluminium with an anodised finish
- The diffuser is 6mm thick and made in tempered glass
- Spider comes complete with die-cast aluminium end caps, silicon gaskets and A4 stainless steel screws
- The cable gland position on the spider allows for the placement of lighting modules close to each other (fig. 1) the modules are wired through for continuous line connection (requires 3983.PC)
- Can be installed on normally flammable surfaces
- Class 2
- IP 65


Fig. 1



One Light Symmetric



Two Light Symmetric



One Light Asymmetric









05
Natural anodised





code lamp details
Single lamp symmetric
3982.1 54W 230V G5
Complete with electronic control gear

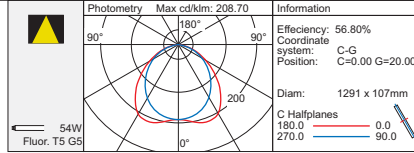


code lamp details
Double lamp symmetric
3982.2 2 x 54W 230V G5
Complete with electronic control gear

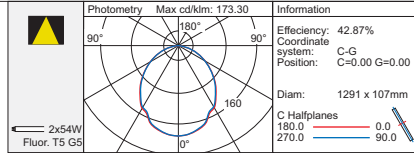


code lamp details
Single lamp asymmetric
3982.3 54W 230V G5
Complete with electronic control gear

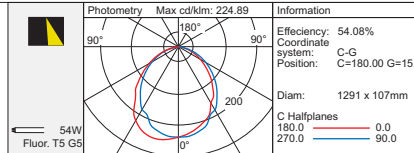

Accessories



code details
Recessed housing in galvanised plate
3982.JAD.C54



code details
Fixing hook for ceiling use
3982.DUC.MF3 - pair



code details
Cable gland IP 65
3983.PC