



- Recessed footlight for wall mounted applications
- Body is made in polyester powder coated die-cast aluminium phosphor-chrome treated with a hardened glass diffuser
- Fitting includes: silicon gasket and exterior A2 stainless steel screws
- Cabling made via two IP 65 cable holders (Ø10mm max) (fig.1)
- Fitting must be installed using box (see accessories)
- Comes complete with built-in gear
- Extruding face plate 6mm thick
- Can be installed on normally flammable surfaces
- Class 1
- IP 54

Fig. 1









code lamp details  
**35W Single ended metal halide**  
**AR/823500** 35W 230V G12  
 Includes integral control gear

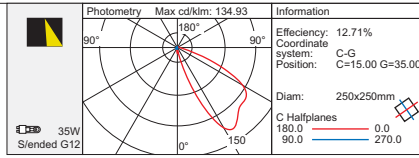



code lamp details  
**70W Single ended metal halide**  
**AR/827100** 70W 230V G12  
 Includes integral control gear

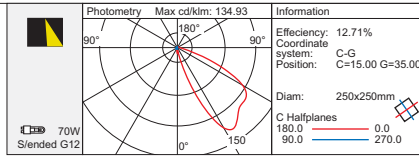

code lamp details  
**70W Double ended metal halide**  
**AR/822900** 70W 230V Rx7s  
 Includes integral control gear

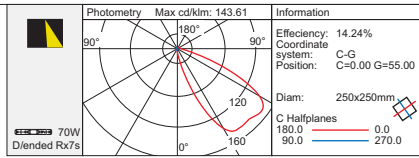

code lamp details  
**26W Compact fluorescent**  
**AR/820900** 26W 230V G24d-3  
 Includes integral control gear

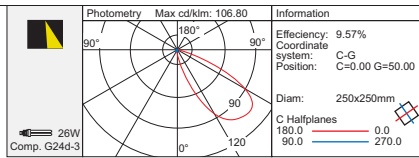

Accessories



code details  
**Alfia box for mounting**  
**AR/60** 120 x 120 x 60mm