




- Surface or wall mounted exterior T5 fluorescent fitting
- The Tie can be used as a single lighting element or as a continuous line of lights
- The body is made in extruded aluminium and comes complete with die-cast aluminium end caps
- Its ultra-thin shape (32mm) allows for installation in a number of applications
- Asymmetric light output
- The double cable gland at each end allows for easy installation in series (fig. 1)
- The reflector slides out for ease of lamp installation (fig. 2)
- The various wall mount accessories allow for either fixed or adjustable mounting (fig. 3a-b)
- The fitting is supplied complete with electronic ballast
- Can be installed on normally flammable surfaces
- Class 2
- IP 65

Fig. 1

Fig. 2

Fig. 3a

Fig. 3b





Extruded Aluminium




code lamp details


Asymmetric surface fitting

**CI/TIE.54MA** 54W 230V G5

Complete with electronic control gear

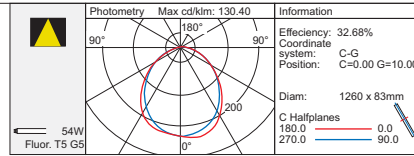


## Accessories




code details

Adjustable wall mount

**CI/TIE.APR**

code details

Ceiling mount bracket

**CI/TIE.DP**

code details

Fixed wall mount

**CI/TIE.AP**

code details

Cable glands

**CI/JAC.PC**