





- T5 Fluorescent lamp for recessed application
- Available in the following variations (fig. 1)
 - One light symmetric
 - Two light symmetric
 - One light asymmetric
- The fixing bracket accessory is necessary for walls and false ceilings with a thickness of between 1mm and 30mm (fig. 2)
- The body is made in extruded aluminium with a specular steel reflector and polycarbonate diffuser
- Includes electronic control gear
- Dimmable version available on request
- Can be installed on normally flammable surfaces
- Class 1
- IP 40


Fig. 1



One Light Symmetric




Two Light Symmetric



One Light Asymmetric

Fig. 2



One Light Symmetric






05
Natural anodised






code lamp details
Single lamp symmetric
3981.1.05 54W 230V G5
 Complete with electronic control gear
 Excludes end caps

 90 x 1260

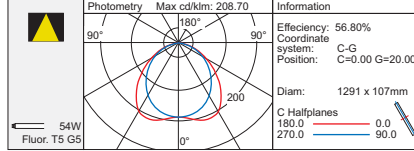




code lamp details
Double lamp symmetric
3981.2.05 2 x 54W 230V G5
 Complete with electronic control gear
 Excludes end caps

 90 x 1260

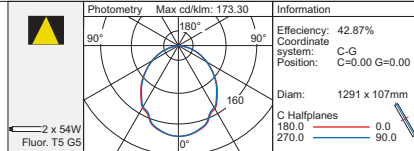


code lamp details
Single lamp asymmetric
3981.3.05 54W 230V G5
 Complete with electronic control gear
 Excludes end caps


 90 x 1260

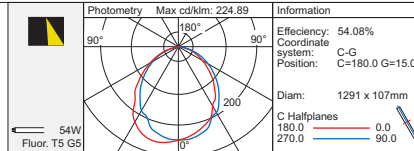


Accessories



code details
 Various end caps
A) 3981.TE2 Flat end cap small lip
B) 3981.TE3 Flat end cap large lip



code details
 Fixing bracket for wall and ceiling use
3981.MF



code details
 Linear joint
3981.CD