




- Recessed version of the T-Uni fluorescent for wall and ceiling use
- End caps sold separately
- The body is made in aluminium and comes complete with a polycarbonate diffuser
- The fitting comes complete with electronic control gear
- For installation into false ceilings with thicknesses ranging from 0.5cm to 3.4cm the bracket accessory is required (fig. 1)
- Dimmable versions available on request
- Can be installed on normally flammable surfaces
- Class 1
- IP 43

Fig. 1









05  
Natural anodised




code lamp details  
**Single lamp version for direct lighting**  
**3860/05** 54W 230V G5  
 Complete with electronic control gear  
 End caps sold separately

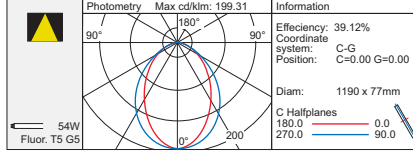


code lamp details  
**Single lamp version for direct lighting**  
**3864/05** 49W 230V G5  
 Complete with electronic control gear  
 End caps sold separately

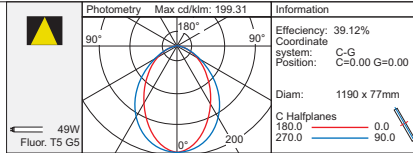


Accessories




code details  
**End cap**  
**CI/TNC.TE**





code details  
**End cap**  
**CI/TNC.TE3**



code details  
**Bracket pair for ceiling installation**  
**CI/TNC.MF**



code details  
**Linear joint**  
**CI/TNC.CD**



code details  
**Recessed housing**  
**CI/TNC.C54** 54W L1230mm  
**CI/TNC.C35** 49/35W L1530mm