



- Recessed footlight for wall mounted applications
- Body is made in polyester powder coated die-cast aluminium phosphor-chrome treated with a hardened glass diffuser
- Fitting includes: silicon gasket and exterior A2 stainless steel screws
- Cabling made via two IP 65 cable holders (Ø10mm max) (fig.1)
- Fitting must be installed using box (see accessories)
- Comes complete with built-in gear
- Extruding face plate 6mm thick
- Can be installed on normally flammable surfaces
- Class 1
- IP 54

Fig. 1









code lamp details
35W Single ended metal halide
AR/823500 35W 230V G12
 Includes integral control gear

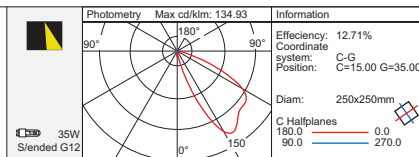



code lamp details
70W Single ended metal halide
AR/827100 70W 230V G12
 Includes integral control gear

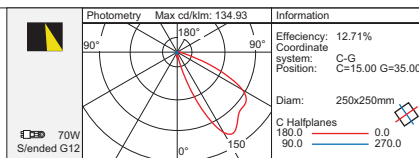

code lamp details
70W Double ended metal halide
AR/822900 70W 230V Rx7s
 Includes integral control gear

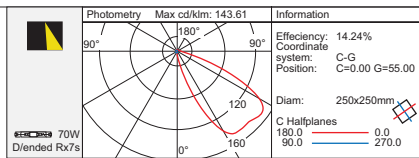

code lamp details
26W Compact fluorescent
AR/820900 26W 230V G24d-3
 Includes integral control gear

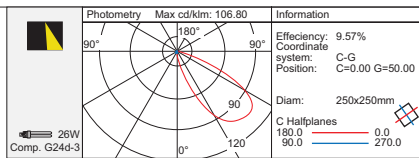

Accessories



code details
Alfia box for mounting
AR/60 120 x 120 x 60mm