



- Outdoor light fitting for wall mounted applications
- The body is made in polyester powder coated aluminium with a frosted sandblasted glass diffuser
- Silicon o-ring seals
- Exterior screws exposed to atmospheric agents are in stainless steel
- Available in a unidirectional: mono-light or bidirectional: double-light version
- Cabling made via a rubber cable holder for $\varnothing < 10\text{mm}$ cables
- Can be installed on normally flammable surfaces
- Class 1
- IP 54





code lamp details
Wall mounted mono-light
AR/691621 2 x 26W 230V G24d-3
 Includes integral control gear

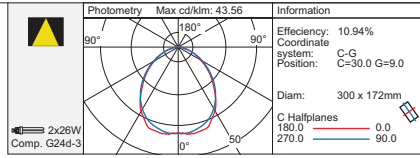

code lamp details
Wall mounted double-light
AR/691622 2 x 26W 230V G24d-3
 Includes integral control gear

