





- For outdoor wall mounted applications
- The body is made in polyester powder coated die-cast aluminium with a tempered glass diffuser
- Silicon o-ring seals
- Stainless steel external screws
- Available in a bidirectional mono-lamp or double-lamp version
- Protection against impact: IK 08 - 5,00 joule
- Cabling made via a rubber cable holder for $\varnothing < 10\text{mm}$ cables
- Can be installed on normally flammable surfaces
- Class 1
- IP 54





code lamp details
Bidirectional mono-lamp
AR/737100 70W 230V G12
 Includes integral control gear

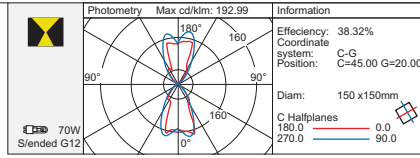

code lamp details
Bidirectional double-lamp
AR/727200.2 2 x 70W 230V G12
 Includes integral control gear

